



J27435

Commercial

27" Monitor-Receiver

High-Performance Video System with up to 680 LOR
 Comb Filter
 Broadcast Stereo Sound and SAP
 Sound Logic™ Audio Leveler
 Switchable (variable/fixed) Audio Outputs
 Volume Limiter and Initial Volume
 181-Channel Tuning**
 Channel-Guide with One-Button Access
 Closed-Captioning with "Caption Vision"***
 126 Custom 8-Character Channel Labels
 User Remote with TV1/TV2 Capability
 English/French/Spanish Menus and Displays
 Initial Channel, Channel Lists, Channel Hold
 "Energy Star" Certification
 Power Provisions for Third-Party Modules
 Spill-Resistant Cabinet
 Digital Serial Communications Interface (DSCI)
 Configuration Menus with Non-Volatile Memory
 Selectable Weak Signal Muting
 Selectable Clock and Scheduler
 Selectable Automatic Turn-off
 Selectable Force-on Operation
 IR and Wired Cloning Capabilities
 Front A/V Jacks
 5-Jack Monitor Panel with 5-Video Connector
 LED Power Indicator
 Front Panel Lockout
 Configurable "V-Chip Technology"



Energy Star Certified



Front A/V Jacks



ClonePRO™ Programming



One-Button Channel Guide



8-Character Channel Labeling



Digital Serial Communications Interface

www.rcacommercial.com

Picture

High-Performance Video System with advanced circuitry to deliver outstanding picture performance, with up to 680 lines of horizontal resolution*

Comb Filter creates even more superb color, sharpness and detail in the picture, eliminating blurred edges between colors and reducing dot crawl

Sound

Broadcast Stereo Sound and SAP for rich, stereo sound or SAP (secondary audio program) where available

Switchable (variable/fixd) Audio Outputs offer maximum flexibility when connecting to various external audio components

Sound Logic™ Audio Leveler eliminates sound blasts during commercial breaks, maintaining a more consistent overall audio level

Volume Limiter and Initial Volume establish maximum and consistent initial volume settings each time television is turned on

Commercial Features

181-Channel Tuning for a wide range of options using off-air, satellite/cable or internally generated program signals**

Channel-Guide with One-Button Access for an on-screen listing of all available channels and their identification labels

8-Character Channel Labeling allows for on-screen display of both network affiliation and channel number

User Remote with TV1/TV2 Capability allows simultaneous control of two monitors in the same room

“Energy Star” Certification saves energy costs

Power Provisions for Third-Party Modules eliminate the need for wall-transformers, wiring snarls and “set-top” boxes

Digital Serial Communications Interface (DSCI) allows third-party interactive systems to monitor and control television with optimal performance and efficiency

Configuration Menus with Non-Volatile Memory for site-specific specifications and limitations on how televisions can be operated and retained, even when power is lost

Selectable Weak Signal Muting mutes audio, blanks video and provides an on-screen message if signal is weak or lost

Selectable Clock and Scheduler with automatic time set allows TV signal to automatically set time (where available); scheduled turn on/off events can be one-time or recurring

Selectable Automatic Turn-off permits television to turn off automatically after a period of inactivity

IR and Wired Cloning Capabilities allow rapid duplication of configuration information between televisions for ease of installation and maintenance

Front Access A/V Jacks offer convenient connection of external audio or video components

Front Panel Lockout prevents tampering

Commercial Cabinet with Spill-Resistant Back prevents equipment damage and provides integral mounting ability

Decommercialization facilitates after-market resale and allows television investment recovery at the end of service life


Specifications

Lines of Horizontal Resolution: 680*


Inputs: Audio: right & left/monaural
Video: CVBS
S-Video: Y/C
DSCI port for interactivity
Front: video and right & left/monaural audio

Outputs: Audio: right & left/monaural (variable fixed)

front



back

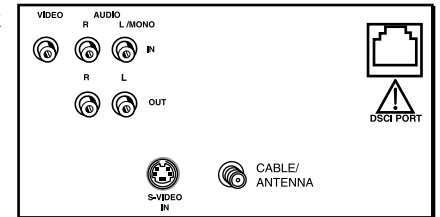

Power Cord: 10-foot, 3-prong grounded

Power Requirements: 120VAC (+/-)10%, 60Hz

Power Consumption: Stand-by: less than 3 watts (Energy Star Certified)

Operating: 125 watts

Cabinet: Construction: high-impact flame-retardant polystyrene, spill-resistant back

Finish: textured dark silver

Dimensions: 23"H, 25 3/8"W, 18 7/8"D

Remote: User Remote included

Shipping Weight: 85 lbs. (approximate)

Certification: UL Commercial Listing

Limited Warranty: 1 year parts and labor, 2 years picture tube

* Lines per picture width based on EIA measurement criteria.

** Check your cable company's compatibility requirements.

*** This television receiver provides display of television closed-captioning in accordance with §15.119 of the FCC rules. This television does not support color attributes of television closed-captioning.

Optional Accessories

CBX203 ClonePRO™ Remote

This unique accessory developed by RCA significantly reduces installation and programming time, allowing you to program one television and then transfer the same data to all similar sets in just seconds. The more RCA televisions you install, the more efficiency you gain.



Master Remote

The RCA Master Remote maintains control of all setup menus, including audio and video functions.



COMMERCIAL PRODUCTS

©2002 Thomson Inc.

www.rcacommercial.com • Phone: 1-800-333-7221

Commercial Sales and Distribution • MS INH305
10330 North Meridian Street • Indianapolis, Indiana 46290-1024

Trademark(s) © Registered Marca(s) Registrada(s) Printed in U.S.A. 12/02-5M
TV pictures simulated Specifications subject to change without notice.

